


E. R. BUTLER & CO.

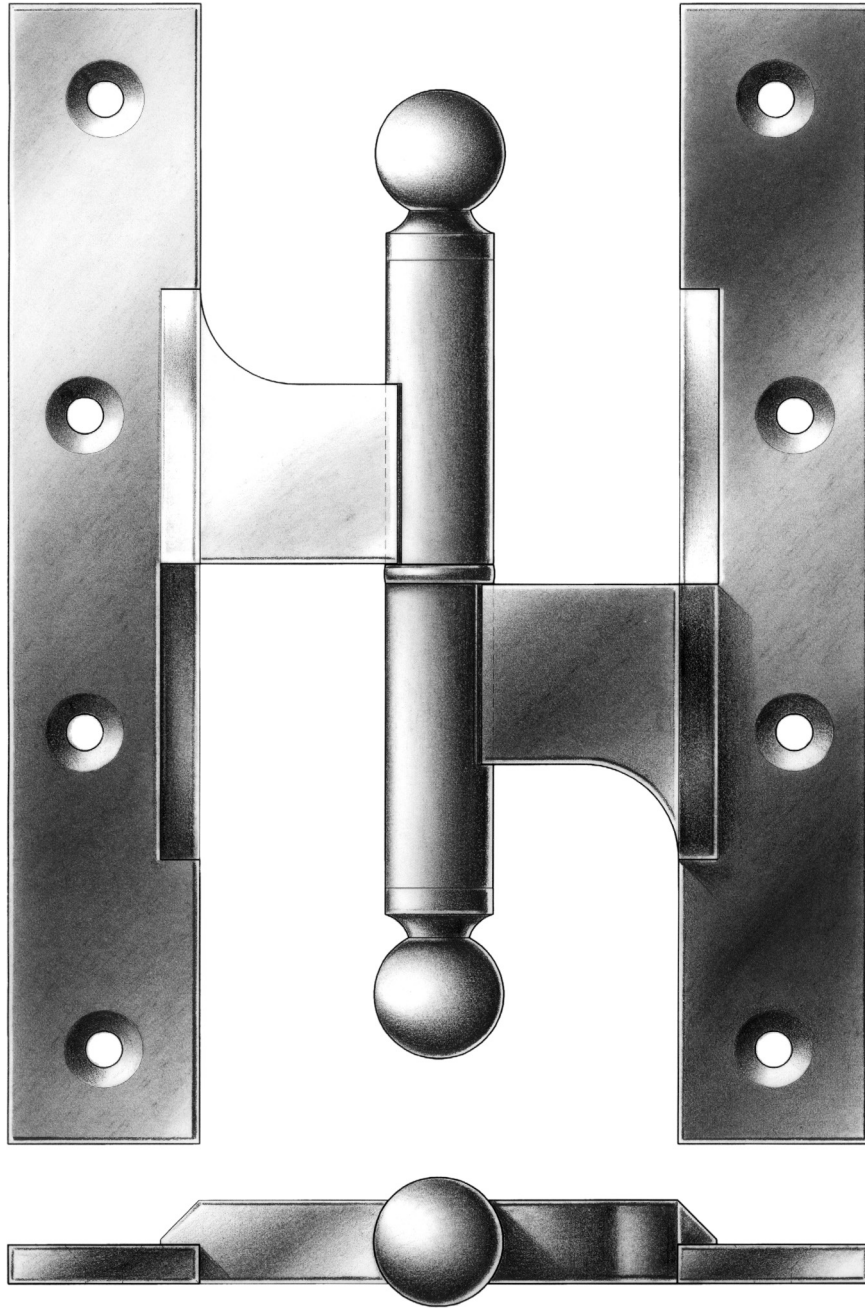

Full Mortise Interlock Paumelle Hinge

Two-Knuckle with Interchangeable Bearing Ring, Barrel, & Finial System

Available as $7\frac{1}{2} \times 5\frac{5}{8}$ " (L), $6 \times 4\frac{1}{2}$ " (M), and $4\frac{1}{2} \times 3\frac{3}{8}$ " (S) for Doors. (M Shown).

Designed for $1\frac{3}{8}$ through $2\frac{1}{4}$ inch thick Average Frequency Doors.

Also Available as $3 \times 2\frac{1}{4}$ " (XS) for $\frac{3}{4}$ through $1\frac{1}{2}$ inch thick Cabinet Doors.

May Be Used with All E.R. Butler & Co. Finial Tips.

Specify Hand (Right Hand Shown). Solid Extruded Brass.

Standard, Custom Plated and Patinated Finishes Available.

Full Scale

FINE ARCHITECTURAL, BUILDERS' AND CABINETMAKERS' HARDWARE

FULL MORTISE
INTERLOCK HINGES

TWO-KNUCKLE (*Interchangeable Bearing & Finials*)

<i>Hinge Dimension (Height by Width)</i>	<i>Barrel Diameter</i>	<i>Leaf Thickness</i>	<i>Screw (FHWS)</i>
3 × 2¼	¾	0.079	No. 8 × 1
4½ × 3¾	½	0.156	No. 10 × 1¼
6 × 4½	⅞	0.188	No. 12 × 1½
7½ × 5⅝	⅝	0.219	No. 14 × 1½